



MFPT-100-300M+ 脉冲光纤激光器

使用手册

版权说明

“ ”

引 语

MFPT

MFPT

.....	1
第一章 特性说明	4
第二章 安全信息	5
1-	5
2-	6
3-	6
4-	9
第三章 产品描述	10
1-	10
2-	10
3-	11
第四章 详细规格	12
1-	12
2-	13
3-	13
第五章 使用指南	15
1-DB25	15
2-	20
3-	22

4-	22
5-	25
6-	26
7-	28
8-	31
第六章 常见故障处理	40
1-	40
2-	40
第七章 服务与维修	41
1-	41
2-	41
第八章 保修声明	42
1-	42
2-	42

第一章 特性说明

MFPT-100-300M+




1060-1070 nm

MFPT-100-300M+

Class 4

第二章 安全信息

1 -

1060nm

Class

100W

2-

1

2

LaserVision USA Kentek Corporation Rochwell Laser Industries

3-

1

2

3

1

2

3

4

5

6

7

8 焦距 510mm 及以上场镜，除漆效果暂无法保证。

9 K9

"

"

4

AC

220VAC

5

1

2

5cm

4

3

6

1

2



3

4

5

6

7

4-

Laser Institute of America(LIA)

13501 Ingenuity Drive, Suite 128

Orlando,Florida 32826

Phone:407 380 1553,Fax: 407 380 5588

Toll Free:1 800 34 LASER

American National Standards Institute

ANSI Z136.1, American National Standard for the Safe Use of Lasers

(Available through LIA)

International Electro-technical Commission

IEC 60825-1, Edition 1.2

Center for Devices and Radiological Health

21 CFR 1040.10 - Performance Standards for Light-Emitting Products

US Department of Labor - OSHA

Publication 8-1.7 - Guidelines for Laser Safety and Hazard Assessment.

Laser Safety Equipment

Laurin Publishing

Laser safety equipment and Buyer' s Guides

第三章 产品描述

1-

MFPT-M+

MOPA

1064 nm

10 kW

25 Pin

1

2

3

4

25

RS232

1

2

2-

MFPT-100M+	100W
MFPT-120M+	120W
MFPT-150M+	150W
MFPT-200M+	200W

MFPT-250M+	250W
MFPT-300M+	300W

3-

第四章 详细规格

1-

	MFPT- 100M+	MFPT- 120M+	MFPT- 150M+	MFPT- 200M+	MFPT- 250M+	MFPT- 300M+
	&					
(W)	100	120	150	200	250	300
(mJ)	1.8					
(ns)	10-500					
(kHz)	1~4000					
(kHz)	55~4000	65~4000	80~4000	110~4000	150~4000	165~4000
M2	<1.6, 1.3					
(%)	<5					
(VDC)	220					
(W)	-550	-600	-700	-900	-1100	-1300
(nm)	1066± 3					
3dB (nm)	<15					
(%)	10-100					
(mm)	5-7*				8± 1*	
	90%					

(m)	5m*
-----	-----

*


2-

1		0-40	
2		-10-60	
3		10-95	%
4			
5	10%~90%	10	us
6	90%~10%	10	us
7		490.4*422*131.3	mm
8		25	kg

3-





100~300M+

mm

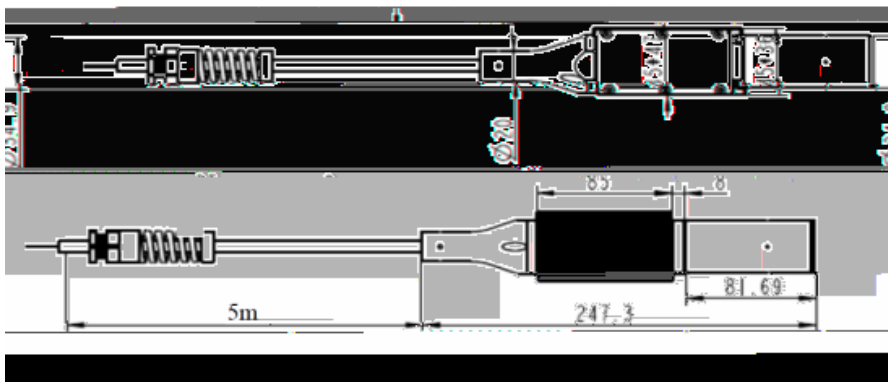

100~300M+

mm

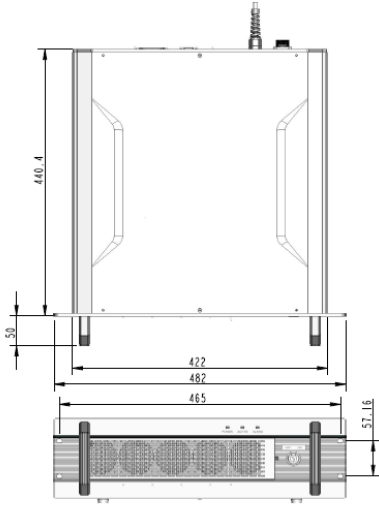

第五章 使用指南

	1

1 -DB25


1

Pin TTL

TTL

Pin #	
1-8 DO-D7	1. 16 0-FF 10 0-255 LSB(D0) Pin1, MSB(D7) Pin8 - 00h(0): - FFh(255): - 00h.
	2. DB25.22 D1 D2

9	
14 15	
11 12 16 21	
17	+5± 0.25V DC
18	MO
	: MO
	: MO
19	booster /
	: booster
	: booster
20	()
22	1. () /
	2. ,
23	: :
24 25	

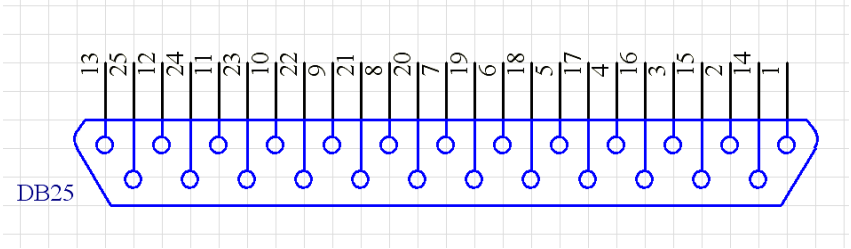

2

DB-25

1 DB25

2 Pin1~8 8bit Pin1 LSB Pin8 MSB Pin
0~255 0~100%

	1	2	3	4
Pin1	0	0	0	0
Pin2	0	0	0	0
Pin3	0	0	0	0
Pin4	0	0	0	0
Pin5	0	0	0	1
Pin6	0	0	1	1
Pin7	0	1	1	1
Pin8	1	1	1	1
	50%	75%	87.5%	93.75%

3 Pin 9 Pin 1~8 Pin 9

Pin 9 1μs Pin 1~8

Pin 1~9 2μs

10 kHz

100µs

4 Pin 11 Pin 12 Pin 16 Pin 21

Pin 11

Pin 12

Pin12	Pin11	Pin16	Pin21	
		L	L	
		H	L	PD
		L	H	
		X	X	

Pin 18 Pin 19

Pin 11 Pin 12 Pin 16 Pin 21

5 Pin 18 EE

5ms

Pin 9 EM

PCB Pin 18


Pin 18 Pin 18

PCB Pin 19 Pin 19

6 Pin 19

Pin 19

Pin 19

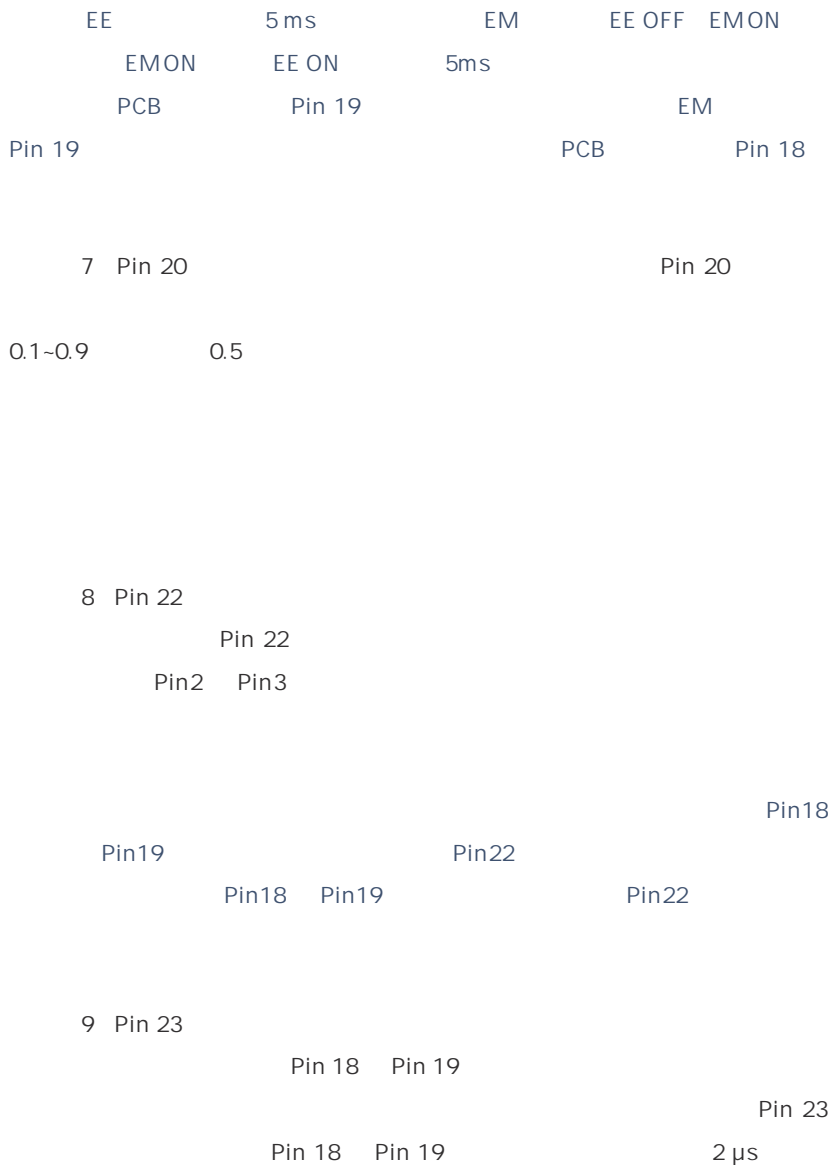

2-

1

1
 2 DB25 5.2.2
 DB25
 3

Pin 18 19 22	
Pin 23	
Pin 20	

4
 5 220VAC 10
 6 Pin 1-8 Pin 9
 7 Pin 18 EE
 8 5 ms
 9 Pin 19 Pin 19
 ON/OFF
 10 ON/OFF EM OFF 500 ms


EE

11 EE EM Pin 18 Pin 19
 12

2

1 Pin 20

Pin 20

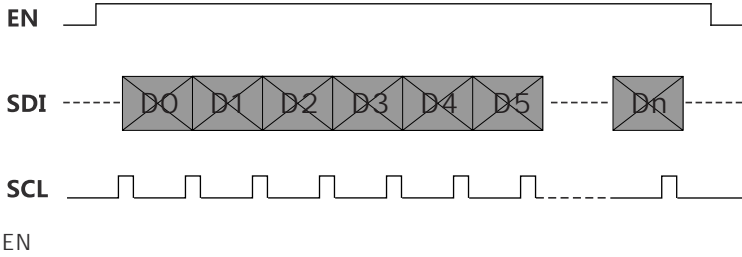

2

4 BYTE 32 bit

[HEAD] -> [PULSEWIDTH]

2 BYTE 2 BYTE

HEAD = 0x A501

PULSEWIDTH =

10ns, 0x A501000A 32bit

4 -

1

1


5 ms

10 s

2

EE

1 μs

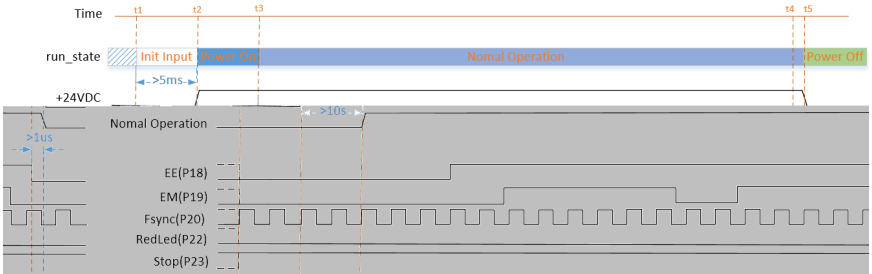

2

1

EE

5 ms

EM

EM


200 ns

2


EM

1 μs


EE

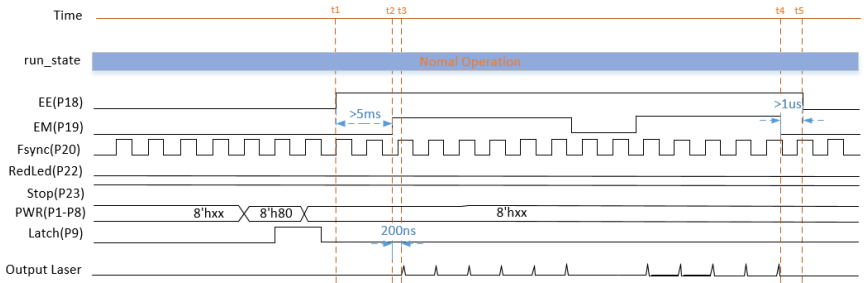


3

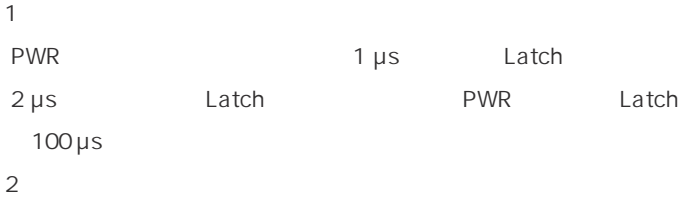

4 μ s

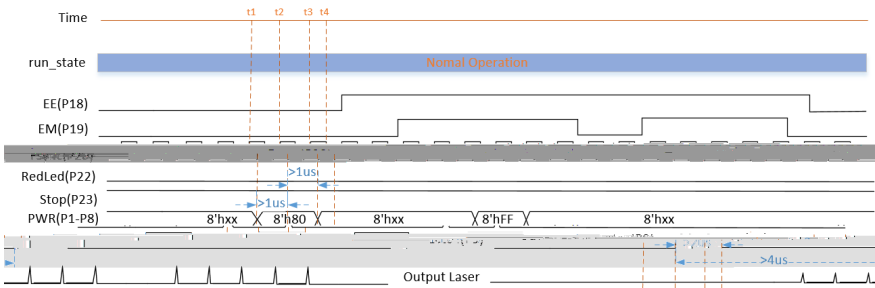

4

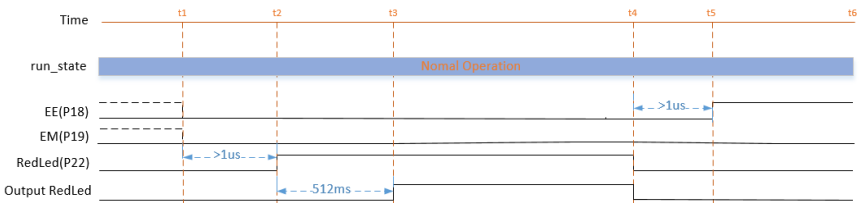

5 STOP

1 Stop

Stop


Stop

100 ms

2


Stop

1 s

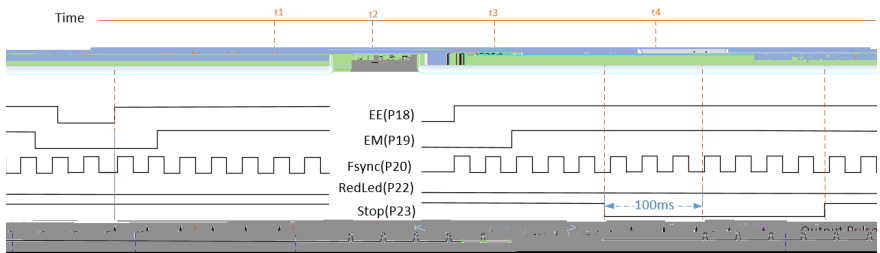


5-

1

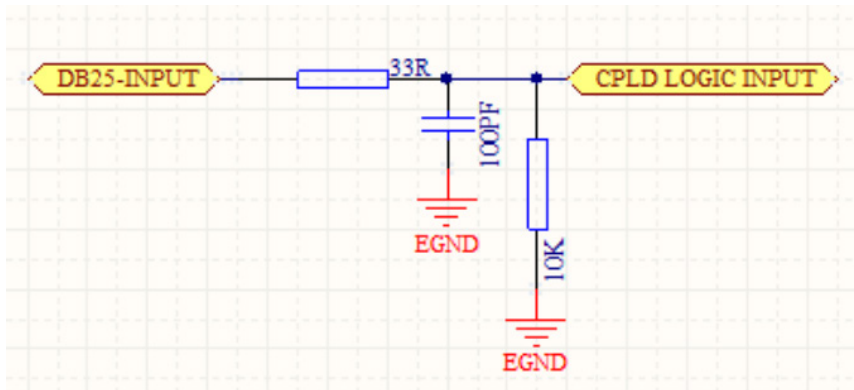

5± 2V

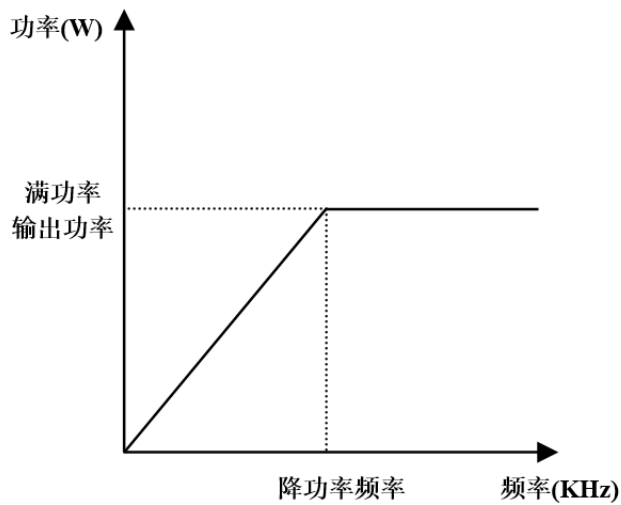

1

2

MFPT-300M+

500 ns

165 kHz

165 kHz


300 W

7 -

1

1

RS232

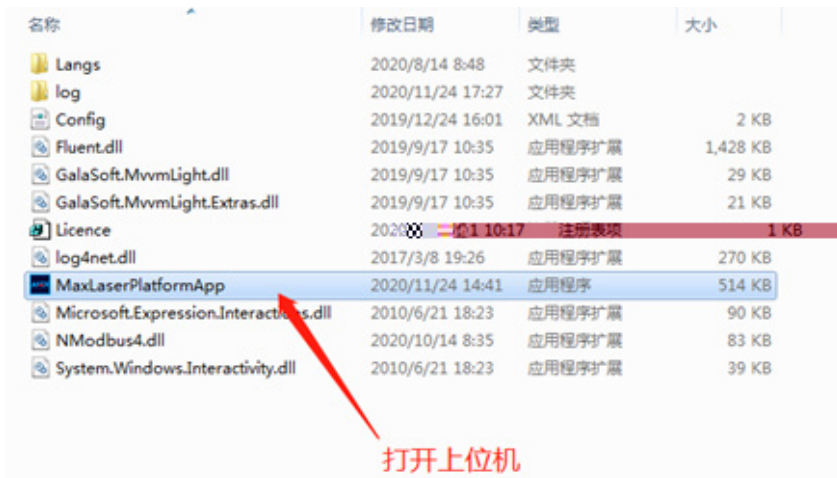

2

RS232

COM


IP

IP

IP



2

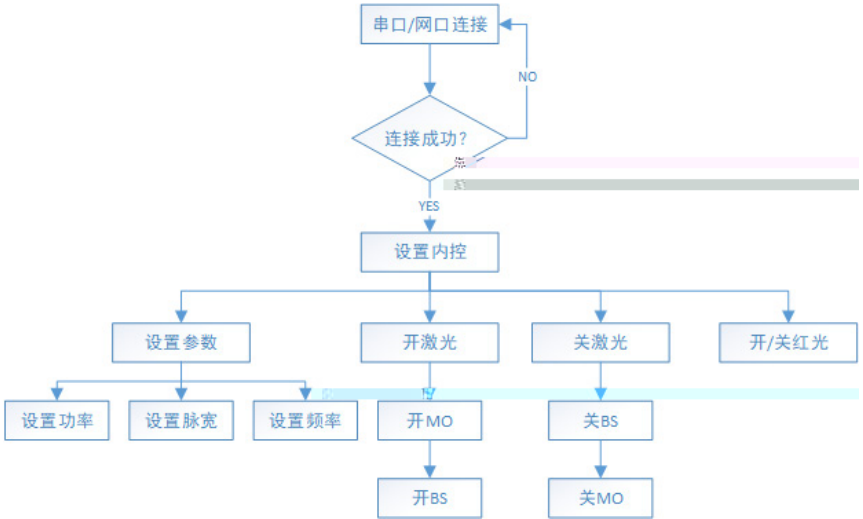

- 1
- 2
- 3

MO BS

BS

RS232/

8-

1

230400

8

1

2

IP 192.168.10.10 5000

3

Modbus RTU

byte	1	1	2	N	2

1. 0x7F

2.

0x03

0x06

0x10

1 0x03

Field Name	Example(HEX)	Description
Slave Address	0x7F	
Function	0x03	
Register Address H	0x80	
Register Address L	0x00	
Register Count H	0x00	
Register Count L	0x02	
CRCH		CRC
CRCL		CRC

Field Name	Example(HEX)	Description
Slave Address	0x7F	
Function	0x03	
Byte count	0x04	
Data1 H	0x01	1
Data1 L	0x2B	1
Data2 H	0x01	2
Data2 L	0x11	2
CRCH		CRC
CRCL		CRC

2

0x03

Field Name	Example(HEX)	Description
Slave Address	0x7F	
Function	0x03	
Register Address H	0x80	
Register Address L	0x00	
Register Count H	0x00	
Register Count L	0x01	
CRCH		CRC
CRCL		CRC

Field Name	Example(HEX)	Description
Slave Address	0x7F	
Function	0x03	
Byte count	0x02	
Data1 H	0x01	
Data1 L	0x2B	
CRCH		CRC
CRCL		CRC
CRCL		CRC

3 0x06

Field Name	Example(HEX)	Description
Slave Address	0x7F	
Function	0x06	
Register Address H	0x80	
Register Address L	0x00	
Present Data1 H	0x00	
Present Data1 L	0x02	
CRCH		CRC
CRCL		CRC

Field Name	Example(HEX)	Description
Slave Address	0x7F	
Function	0x06	
Register Address H	0x80	
Register Address L	0x00	
Present Data1 H	0x00	
Present Data1 L	0x02	
CRCH		CRC
CRCL		CRC

4 0x10

Field Name	Example(HEX)	Description
Slave Address	0x7F	
Function	0x10	
Register Address H	0x80	
Register Address L	0x00	
Register Count H	0x00	
Register Count L	0x02	
Data Count	0x04	
Present Data1 H	0x01	1

Present Data1 L	0x2B	1
Present Data2 H	0x01	2
Present Data2 L	0x11	2
CRCH		CRC
CRCL		CRC

Field Name	Example(HEX)	Description
Slave Address	0x7F	
Function	0x10	
Register Address H	0x80	
Register Address L	0x00	
Register Count H	0x00	
Register Count L	0x02	
CRCH		CRC
CRCL		CRC

4 CRC

```
u16 Modbus_CRC16(u8 *puchMsg, u16 usDataLen )
```

```
{
```

```
    u8 uchCRChi = 0xFF ; //    CRC
```

```
    u8 uchCRCLo = 0xFF ; //    CRC
```

```
    unsigned long uIndex ; // CRC
```

```
    while ( usDataLen-- ) //
```

```
    {
```

```
        uIndex = uchCRChi ^ *(puchMsg++) ; //    CRC
```

```
        uchCRChi = uchCRCLo ^ auchCRChi[uIndex] ;
```

```
        uchCRCLo = auchCRCLo[uIndex] ;
```

```
    }
```

```

return ( uchCRCHi << 8 | uchCRCLo );
}

/* CRC          */
const u8 auchCRCHi[] = {
    0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0, 0x80, 0x41, 0x01, 0xC0,
    0x80, 0x41, 0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0, 0x80, 0x41,
    0x00, 0xC1, 0x81, 0x40, 0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0,
    0x80, 0x41, 0x01, 0xC0, 0x80, 0x41, 0x00, 0xC1, 0x81, 0x40,
    0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0, 0x80, 0x41, 0x00, 0xC1,
    0x81, 0x40, 0x01, 0xC0, 0x80, 0x41, 0x01, 0xC0, 0x80, 0x41,
    0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0, 0x80, 0x41, 0x00, 0xC1,
    0x81, 0x40, 0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0, 0x80, 0x41,
    0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0, 0x80, 0x41, 0x01, 0xC0,
    0x80, 0x41, 0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0, 0x80, 0x41,
    0x01, 0xC0, 0x80, 0x41, 0x01, 0xC0, 0x80, 0x41, 0x00, 0xC1,
    0x81, 0x40, 0x01, 0xC0, 0x80, 0x41, 0x00, 0xC1, 0x81, 0x40,
    0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0, 0x80, 0x41, 0x01, 0xC0,
    0x80, 0x41, 0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0, 0x80, 0x41,
    0x00, 0xC1, 0x81, 0x40, 0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0,
    0x80, 0x41, 0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0, 0x80, 0x41,
    0x01, 0xC0, 0x80, 0x41, 0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0,
    0x80, 0x41, 0x00, 0xC1, 0x81, 0x40, 0x00, 0xC1, 0x81, 0x40,
    0x01, 0xC0, 0x80, 0x41, 0x01, 0xC0, 0x80, 0x41, 0x00, 0xC1,

```

```

    0x81, 0x40, 0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0, 0x80, 0x41,
    0x00, 0xC1, 0x81, 0x40, 0x01, 0xC0, 0x80, 0x41, 0x01, 0xC0,
    0x80, 0x41, 0x00, 0xC1, 0x81, 0x40
};

```

38

```

/* CRC          */
const u8 auchCRCLo[] = {
    0x00, 0xC0, 0xC1, 0x01, 0xC3, 0x03, 0x02, 0xC2, 0xC6, 0x06,
    0x07, 0xC7, 0x05, 0xC5, 0xC4, 0x04, 0xCC, 0x0C, 0x0D, 0xCD,
    0x0F, 0xCF, 0xCE, 0x0E, 0x0A, 0xCA, 0xCB, 0x0B, 0xC9, 0x09,
    0x08, 0xC8, 0xD8, 0x18, 0x19, 0xD9, 0x1B, 0xDB, 0xDA, 0x1A,
    0x1E, 0xDE, 0xDF, 0x1F, 0xDD, 0x1D, 0x1C, 0xDC, 0x14, 0xD4,
    0xD5, 0x15, 0xD7, 0x17, 0x16, 0xD6, 0xD2, 0x12, 0x13, 0xD3,
    0x11, 0xD1, 0xD0, 0x10, 0xF0, 0x30, 0x31, 0xF1, 0x33, 0xF3,
    0xF2, 0x32, 0x36, 0xF6, 0xF7, 0x37, 0xF5, 0x35, 0x34, 0xF4,
    0x3C, 0xFC, 0xFD, 0x3D, 0xFF, 0x3F, 0x3E, 0xFE, 0xFA, 0x3A,
    0x3B, 0xFB, 0x39, 0xF9, 0xF8, 0x38, 0x28, 0xE8, 0xE9, 0x29,
    0xEB, 0x2B, 0x2A, 0xEA, 0xEE, 0x2E, 0x2F, 0xEF, 0x2D, 0xED,
    0xEC, 0x2C, 0xE4, 0x24, 0x25, 0xE5, 0x27, 0xE7, 0xE6, 0x26,
    0x22, 0xE2, 0xE3, 0x23, 0xE1, 0x21, 0x20, 0xE0, 0xA0, 0x60,
    0x61, 0xA1, 0x63, 0xA3, 0xA2, 0x62, 0x66, 0xA6, 0xA7, 0x67,
    0xA5, 0x65, 0x64, 0xA4, 0x6C, 0xAC, 0xAD, 0x6D, 0xAF, 0x6F,
    0x6E, 0xAE, 0xAA, 0x6A, 0x6B, 0xAB, 0x69, 0xA9, 0xA8, 0x68,
    0x78, 0xB8, 0xB9, 0x79, 0xBB, 0x7B, 0x7A, 0xBA, 0xBE, 0x7E,
    0x7F, 0xBF, 0x7D, 0xBD, 0xBC, 0x7C, 0xB4, 0x74, 0x75, 0xB5,

```

0x77, 0xB7, 0xB6, 0x76, 0x72, 0xB2, 0xB3, 0x73, 0xB1, 0x71,
 0x70, 0xB0, 0x50, 0x90, 0x91, 0x51, 0x93, 0x53, 0x52, 0x92,
 0x96, 0x56, 0x57, 0x97, 0x55, 0x95, 0x94, 0x54, 0x9C, 0x5C,
 0x5D, 0x9D, 0x5F, 0x9F, 0x9E, 0x5E, 0x5A, 0x9A, 0x9B, 0x5B,
 0x99, 0x59, 0x58, 0x98, 0x88, 0x48, 0x49, 0x89, 0x4B, 0x8B,
 0x8A, 0x4A, 0x4E, 0x8E, 0x8F, 0x4F, 0x8D, 0x4D, 0x4C, 0x8C,
 0x44, 0x84, 0x85, 0x45, 0x87, 0x47, 0x46, 0x86, 0x82, 0x42,
 0x43, 0x83, 0x41, 0x81, 0x80, 0x40

};

5 MFPT-M+ MODBUS

		short	W/ R		
	25	1	R	PD	bit4 bit[3:0] 7F03001900015FD3 7F03027800B24E
	30000	1	R		7F03753000019417 7F0302000A1049 10ns
	30001	1	R	0-255 100%	255 0 0% 7F0375310001C5D7 7F03020000904E 0

	30002	2	R	1-4000kHz =100000/	7F037532000275D6 7F0304271000006F45 0x00002710 10000 10kHz
GUI/ DB25	30025	1	W/R	Bit0 / (1 GUI 0 DB25) Bit1 (1 GUI 0 DB25) Bit2 (1 GUI 0 DB25) Bit3 (1 GUI 0 DB25)	7F037549000145CE 7F03020000904E DB25 GUI 7F067549000F080A 7F067549000F080A GUI
	30026	1	W	0-255 255 100% 0 0%	20% 7F06754A0033F81B 0033 7F06754A0033F81B
	30027	2	W	1-4000kHz =100000/ MO BS	100kHz 7F10754B000204 03E80000F2E7 03E80000 03E8 0000 7510754B00022166

	30028	1	W	MO BS	100ns 7F06754D00640824 0064 7F06754D00640824
MO	30030	1	W/R	OFF 0x0000 ON 0x0001	7F06754E0001380F 7F06754E0001380F MO
BS	30031	1	W/R	OFF 0x0000 ON 0x0001	7F06754F000169CF 7F06754F000169CF BS
PD	30032	1	W/R	OFF 0x0000 ON 0x0001	7F06755000015809 7F06755000015809 PD
	30033	1	W/R	OFF 0x0000 ON 0x0001	7F067551000109C9 7F067551000109C9
	40004	1	R		7F039C440001E051 7F0302001D5047 0x001D 29

第六章 常见故障处理

1 -

1

2

3

4

5 DB25

6 PIN18 PIN19

7

5.2 DB25

2 -

1

2

3

4

5

2

6

7

第七章 服务与维修

1 -

2 -

400-900-9588

第八章 保修声明

1 -

2 -

1
2
3
4
5
6